

SUBMITTAL RECORD _____
 JOB _____
 LOCATION _____
 SUBMITTED TO _____
 SUBMITTAL PREPARED BY _____
 APPROVED BY _____
 DATE _____



Submittal Form Dyn-O-Wrap

DESCRIPTION:

A self-adhesive film which can protect uninstalled duct sections from the intrusion of contaminants. Available in different sizes and several varieties, including Puncture Resistant Wrap and Reverse Puncture Resistant Wrap.

DYN-O-WRAP

- Excellent adhesion to ductwork, yet easily removable without leaving residue.
- Color: Lightning Blue
- Adhesive Color: Water Clear
- 2.5 mil thickness + .5mil for adhesion
- Temperature range: 60° - 80°F
- Humidity range: 30% - 70%
- Lengthy heat, moisture and direct sunlight exposure can negatively affect the product performance.
- Cohesive products should be protected from direct UV contact.
- Up to a six-month shelf life: stored in airtight (white) bags, to keep film from drying out.
- Packaged in boxes




Dyn-O-Wrap

Item #	Code	Description
13380	DW24-200	Dyn-O-Wrap 24" x 200'
13384	DW36-200	Dyn-O-Wrap 36" x 200'
13388	DW48-200	Dyn-O-Wrap 48" x 200'



PUNCTURE RESISTANT DYN-O-WRAP & REVERSE PUNCTURE RESISTANT DYN-O-WRAP

- Excellent adhesion to ductwork, yet easily removable without leaving residue.
- Water based and environmentally friendly
- Color: Blue
- Adhesive Color: Water Clear
- 1.5 mil thickness + .5mil for adhesion
- Temperature range: 50° - 90°F - For best results, keep within 60° - 90°F range. (Colder temperatures than listed will lessen the initial bond to the substrate.)
- Humidity range: 40% - 60%
- Keep away from exposure to temperature extremes, direct sunlight, water, solvent and other contaminants.
- Do not store substrates for longer than 6 months with protective masking films applied.
- Up to a six-month shelf life: stored in airtight (white) bags, to keep film from drying out.

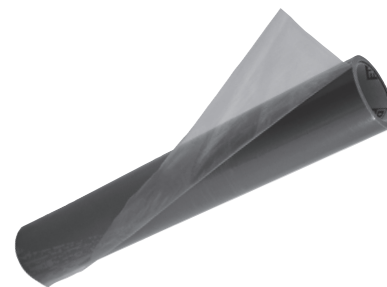

**Puncture Resistant
Dyn-O-Wrap**

Item #	Code	Description
13382	PRW24-200	Puncture Resistant Dyn-O-Wrap 24" x 200'
13386	PRW36-200	Puncture Resistant Dyn-O-Wrap 36" x 200'
13389	PRW48-200	Puncture Resistant Dyn-O-Wrap 48" x 200'
13344	PRW24-400	Puncture Resistant Dyn-O-Wrap 24" x 400'
13345	PRW36-400	Puncture Resistant Dyn-O-Wrap 36" x 400'
13346	PRW48-400	Puncture Resistant Dyn-O-Wrap 48" x 400'
13392	RPRW24-200	Reverse Puncture Resistant Dyn-O-Wrap 24" x 200'
13393	RPRW36-200	Reverse Puncture Resistant Dyn-O-Wrap 36" x 200'
13394	RPRW48-200	Reverse Puncture Resistant Dyn-O-Wrap 48" x 200'

Duro Dyne East Division, Bay Shore, NY
 Duro Dyne Midwest Division, Hamilton, OH
 Duro Dyne West Division, Fontana, CA
 Duro Dyne Canada, Lachine, Quebec, Canada

631-249-9000 Fax: 631-249-8346
 513-870-6000 Fax: 513-870-6005
 562-926-1774 Fax: 562-926-5778
 514-422-9760 Fax: 514-636-0328

www.durodyne.com E-mail: durodyne@durodyne.com



©2019 Duro Dyne Corporation
 Printed in USA 2/19
 B0050019